



# A&E Trading b.v.



Lineaire aandrijftechniek

MANUAL RF HANDSET


DC1149C | DC1800



## DC1149C – Receiver (1 channel)

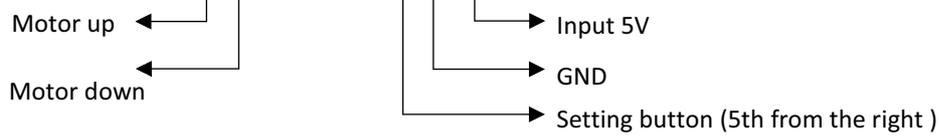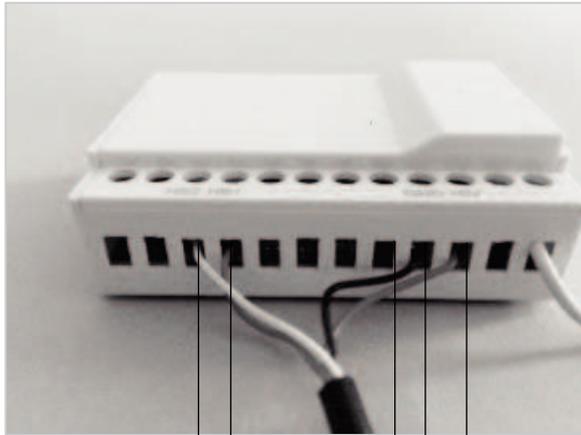


## DC1800 – Single channel handset

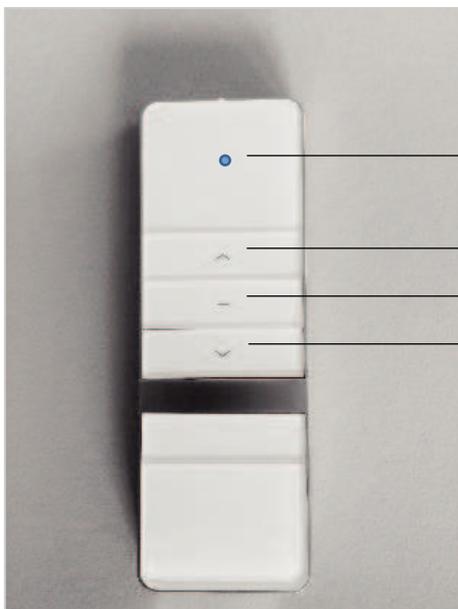

Front



Back



# Installation

During setup, press between the different steps in less than 4.5 seconds, otherwise the system will return to its original state.

## **Controlled movement**

Step 1: Connect the DC1149C receiver to the control box (COMPACT/ SMART) (HS portal)

Step 2: Press 1 x on the setting button of the DC1149C receiver (LED flashes)

Step 3: Press 1 x on the P2 setting button of the handset DC1800 (LED flashes)

Step 4: Press 1 x on the P2 setting button of the handset DC1800 (LED flashes)

Step 5: Press 1 x on the 'up button' on the handset DC1800 (LED flashes)

*The DC1800 handset is now connected to the DC1149C receiver and can be operated by continuously pressing the 'up' or 'down' button. By releasing the button in question, the movement will stop.*

---

## **- Extra function -**

During setup, press between the different steps in less than 4.5 seconds, otherwise the system will return to its original state. Note: if the setting is repeated, the function will be canceled.

## **Automatic movement**

Step 1: Press 1 x on the P2 setting button of the handset DC1800 (LED flashes)

Step 2: Press 1 x on the 'up button' of the DC1800 handset (LED flashes)

Step 3: Press 1 x on the P2 setting button of the handset DC1800 (LED flashes)

*The controlled movement has now been changed to an automated movement. This movement can be controlled by pressing the 'up' or 'down' button once and the movement will start automatically. By pressing the 'stop' button the movement will stop.*

## **- Extra function -**

During setup, press between the different steps in less than 4.5 seconds, otherwise the system will return to its original state. Note: handset 'A' is the already paired handset, and handset 'B' is not.

## **Add a handset**

Step 1: Press 1 x on the P2 setting button of the handset DC1800 'A' (LED flashes)

Step 2: Press 1 x on the P2 setting button of the handset DC1800 'A' (LED flashes)

Step 3: Press 1 x on the P2 setting button of the handset DC1800 'B' (LED flashes)

*The additional handset 'B' has now been added and can be controlled in the same way as the original handset 'A'.*

**- Extra function -**

During setup, press between the different steps in less than 4.5 seconds, otherwise the system will return to its original state. Note: removes all handset channels, the factory settings are hereby restored.

**Remove all handsets**

Step 1: Press 1 x on the P2 setting button on the DC1800 handset (LED flashes)

Step 2: Press 1 x on the stop button on the DC1800 handset (LED flashes)

Step 3: Press 1 x on the P2 setting button on the DC1800 handset (LED flashes)

*All handsets have been removed and restored tot he factory settings.*

# Contact



**A&E Trading b.v.**

Lorentzpark 13

9351 VJ Leek

T 0594 58 11 58

I [www.aetrading.nl](http://www.aetrading.nl)

E [info@aetrading.nl](mailto:info@aetrading.nl)

**BTW** NL808938605 B01

**KvK Groningen** 02070188

