3200.00-3002

t-Rex-I-44-47-L21 S2

## Characteristic curve at 24 V

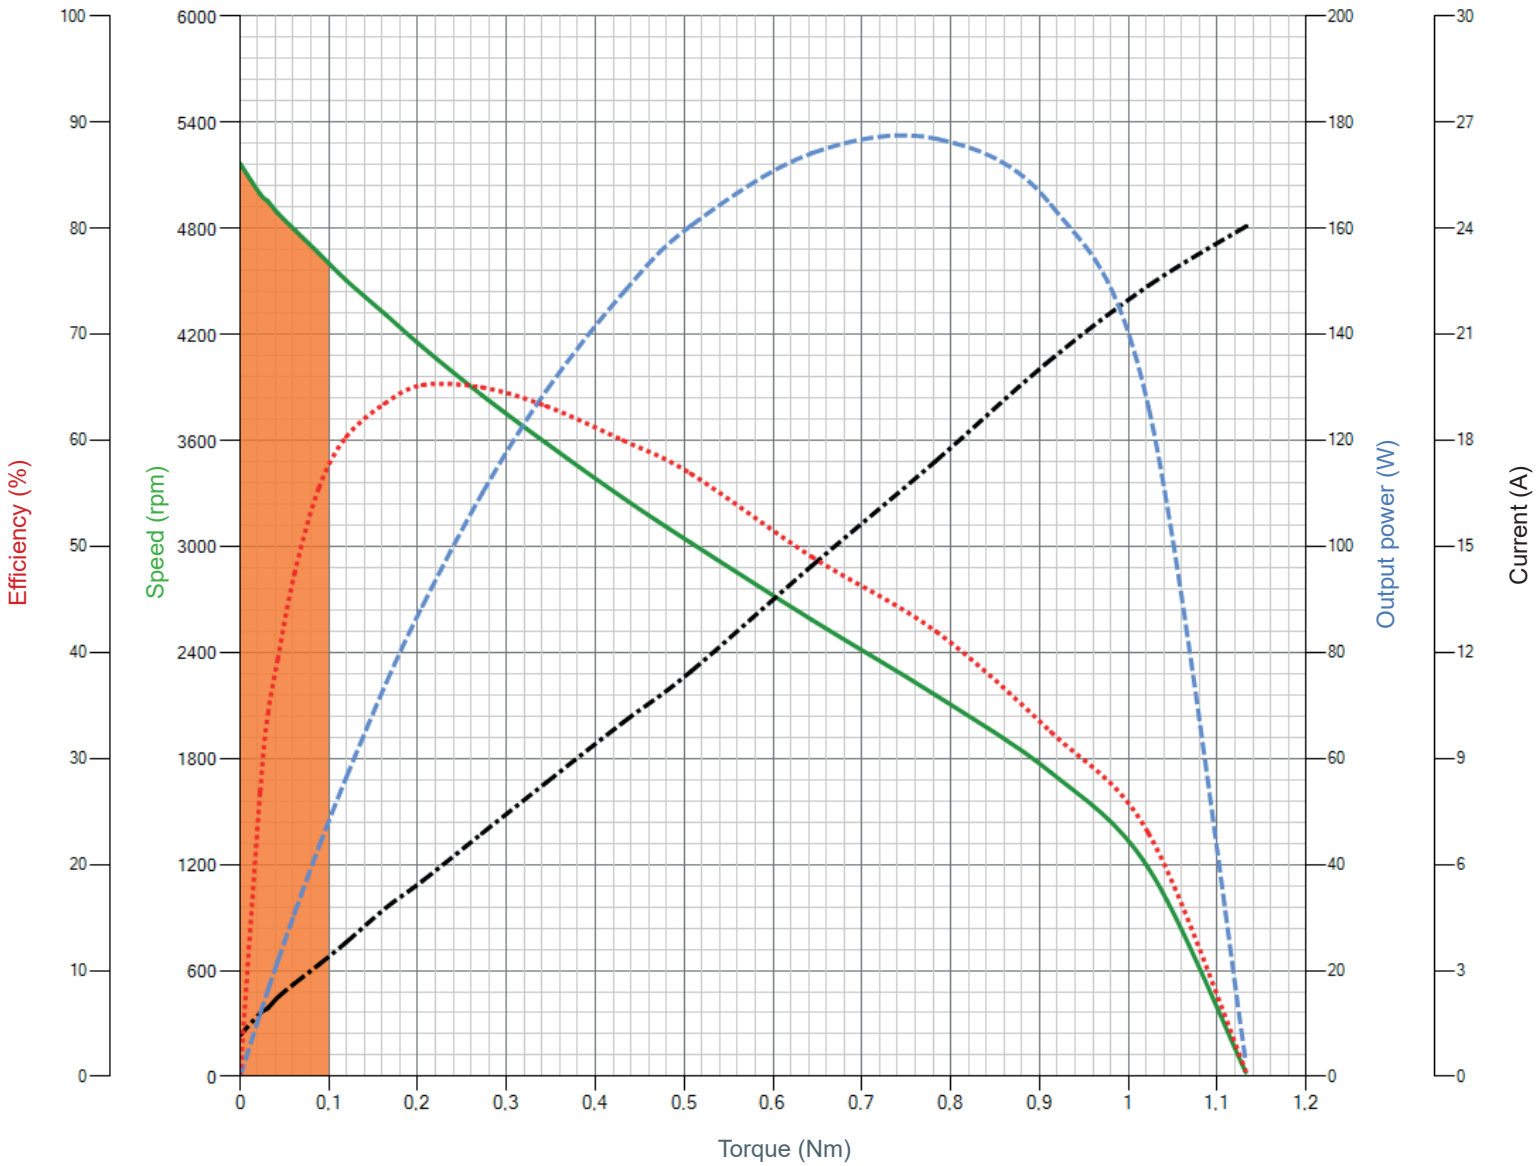


| | |
|---|---|
| ***Setup*** | |
| *Direction* | *CCW* |
| *Voltage* | *24 V* |
| *Temperature* | *21°C* |
| ***Idle state*** | |
| *Speed* | *5168 rpm* |
| *Current* | *1.2 A* |
| ***At torque max.*** | |
| *Torque* | *1.134 Nm* |
| *Current* | *24 A* |
| ***At efficiency max.*** | |
| *Efficiency* | *65 %* |
| *Speed* | *4129 rpm* |
| *Current* | *5.5 A* |
| *Torque* | *0.205 Nm* |
| *Output power* | *89 W* |
| ***At output power max.*** | |
| *Output power* | *177 W* |
| *Speed* | *2156 rpm* |
| *Current* | *17.4 A* |
| *Torque* | *0.784 Nm* |
| *Efficiency* | *42 %* |
| ***At torque*** | ***0.1 Nm*** |
| *Torque* | *0.1 Nm* |
| *Speed* | *4604 rpm* |
| *Current* | *3.4 A* |
| *Output power* | *48 W* |
| *Efficiency* | *57 %* |

Date: 07.10.2022 II 03:03:28 II StA

Current (A) | Output Power W) | S1 Mode | Speed (rpm) | Efficiency (%)